




APPLICATION: Hydrohammer®, type S-90

Code no. 86 20 07 00

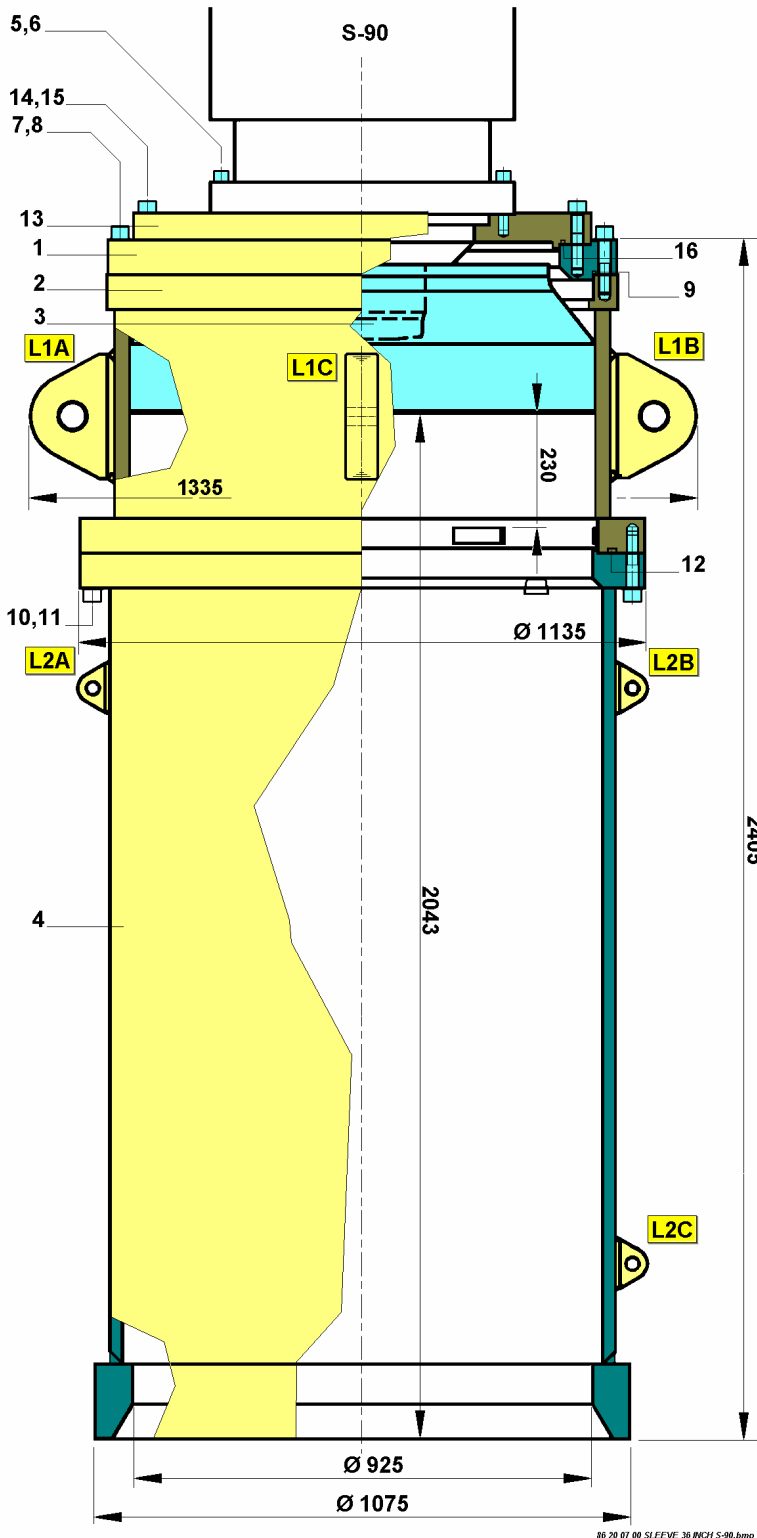

Weights

| | |
|-----------------------|----------------|
| - Connecting ring (1) | 210 kg |
| - Connecting ring (2) | 171 kg |
| - Anvil housing | 522 kg |
| - Anvil | 1470 kg |
| - Pile guiding | <u>1380 kg</u> |
| Total: | 3753 kg |

Measures

| | |
|-----------------|---------|
| Overall length | 2405 mm |
| Overall width | 1335 mm |
| Stick-up length | 2043 mm |

| Lifting eyes | WLL | hole diam. | thick ness |
|--------------------|----------|------------|------------|
| Working Load Limit | | | |
| - L1A/B/C | 25 tons | Ø 54 mm | 45 mm |
| - L2A/B/C | 6,5 tons | Ø 27 mm | 30 mm |

| Pos. | Q'ty | Description | IHC Code no. |
|--|------|-------------------------------------|--------------|
| 1 | 1 | Connecting ring (2) | 86 20 07 03 |
| 13 | 1 | Connecting ring (1) | 86 10 45 05 |
| 2 | 1 | Anvil housing | 86 20 07 01 |
| 3 | 1 | Anvil | 86 11 01 03 |
| 4 | 1 | Pile guiding | 86 20 07 02 |
| <i>Connecting hammer to connecting ring</i> | | | |
| 5 | 40 | HV-ring id=Ø22 | 85 10 90 09 |
| 6 | 40 | Socket head screw M20x100 (12.9) | 85 10 90 01 |
| <i>Connecting connecting ring to anvil housing</i> | | | |
| 7 | 40 | HV-ring id= Ø26 | 85 10 90 10 |
| 8 | 40 | Socket head screw M24x110 (12.9) | 85 15 90 01 |
| 9 | 1 | O-ring 915x5 | 85 70 90 23 |
| <i>Connecting anvil housing to pile guiding</i> | | | |
| 10 | 24 | HV-ring id= Ø26 | 85 10 90 10 |
| 11 | 24 | Socket head screw M24x110 (12.9) | 85 15 90 01 |
| 12 | 1 | O-ring 980x7 (L=3075mm) | 85 30 90 78 |
| <i>Connecting ring (1) to connecting ring (2)</i> | | | |
| 14 | 20 | HV-ring id= Ø26 | 85 10 90 10 |
| 15 | 20 | Socket head screw M24x110 (12.9) | 85 15 90 01 |
| 16 | 1 | O-ring 815x7 | 85 30 90 66 |