




APPLICATION: Hydrohammer® S-120/150

Code no. 86.20.06.00

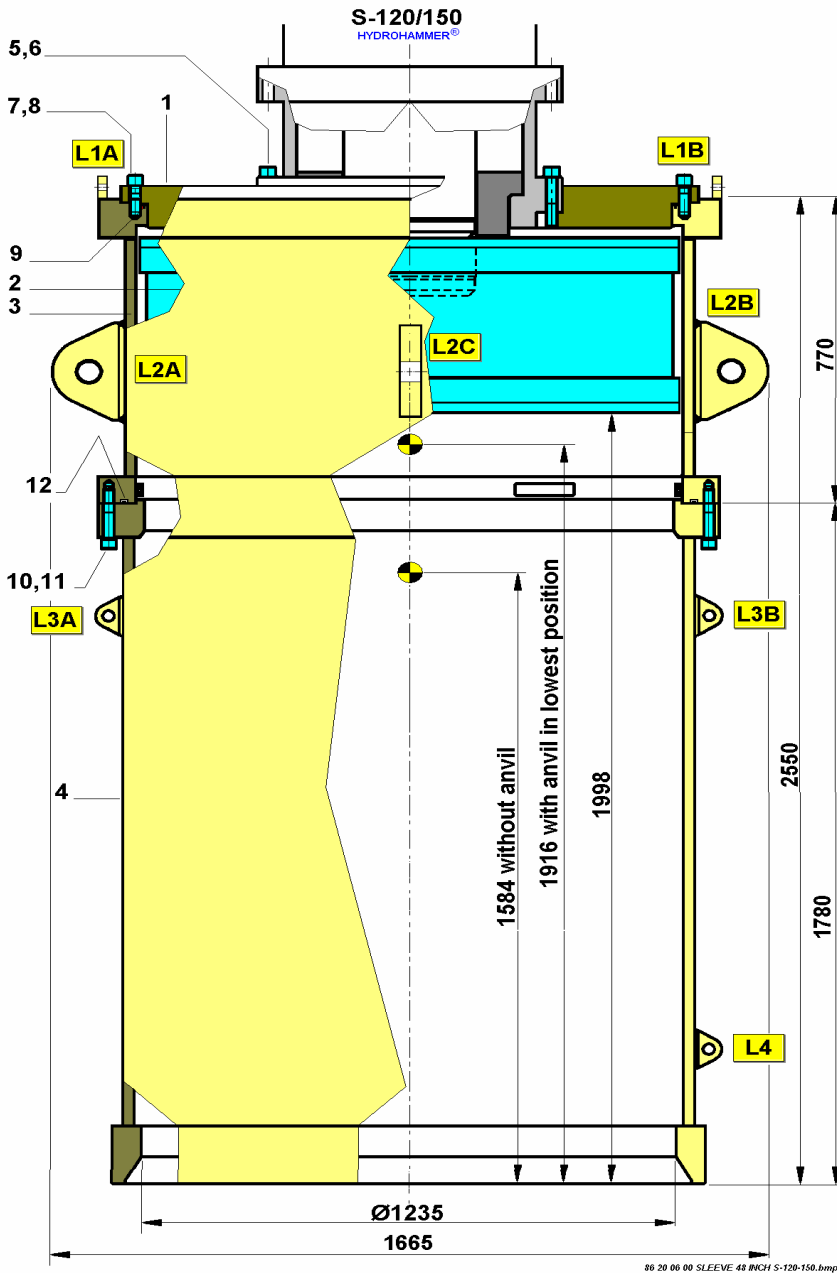

**Weights**

- Connection ring	775 kg
- Anvil housing	1040 kg
- Anvil	4200 kg
- Pile guiding	1835 kg
<b>Total</b>	<b>7850 kg</b>

**Measures**

Overall length	2550 mm
Overall width	1665 mm
Stick-up length	1998 mm

Lifting eyes	WLL	hole diameter	thick ness
- L1A/B	6.5 tons	Ø 27 mm	30 mm
- L2A/B/C	25 tons	Ø 54 mm	45 mm
- L3A/B	6.5 tons	Ø 27 mm	30 mm
- L4	6.5 tons	Ø 27 mm	30 mm

Pos.	Q'ty	Description	IHC Code no.
1	1	Connection ring .....	86 10 81 43
2	1	Anvil .....	86 16 62 02
3	1	Anvil housing .....	86 20 06 01
4	1	Pile guiding .....	86 20 06 06

*Connecting hammer to connection ring*

5	40	HV-ring .....	85 10 90 10
		id=Ø26	
6	40	Socket head screw.....	85 20 90 01
		M24x130 (12.9)	

*Connecting connection ring to anvil housing*

7	32	HV-ring .....	85 10 90 10
		id=Ø26	
8	32	Socket head screw.....	86 10 90 31
		M24x80 (12.9)	
9	1	O-ring .....	85 80 90 01
		1220x5.3	

*Connecting anvil housing to pile guiding*

10	24	HV-ring .....	85 10 90 10
		id=Ø26	
11	24	Socket head screw.....	85 20 90 01
		M24x130 (12.9)	
12	1	O-ring .....	85 30 90 78
		1300x7 (L=4085)	

**Raker piling: 1:4 max.**