




APPLICATION: Hydrohammer® type S-35/70/90

Code no. 86.10.24.00

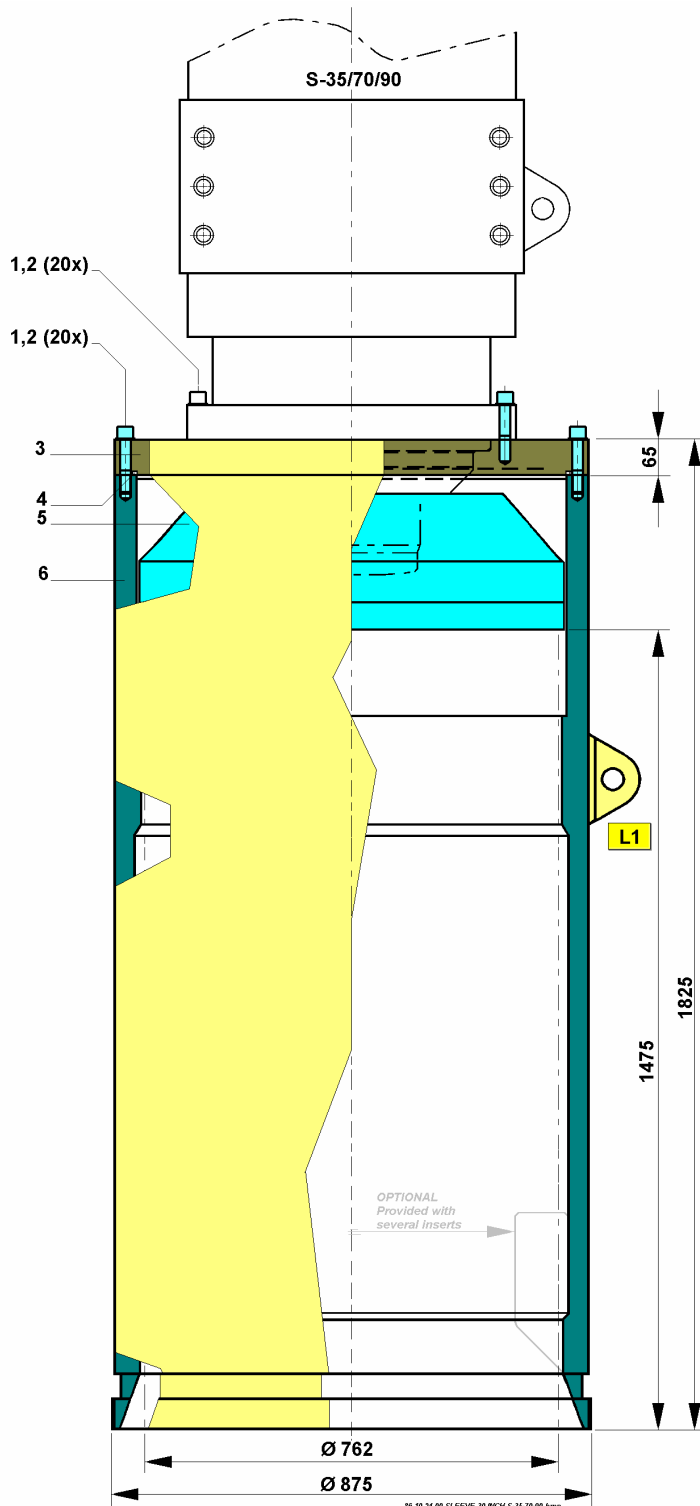

Weights

- Connecting ring	195 kg
- Pile guiding	1500 kg
- Anvil	820 kg
Total	2515 kg

Measures

Overall length	1825 mm
Overall width	975 mm
Stick-up length	1475 mm

Lifting eyes	WLL	hole	thick
Working Load Limit		diameter	ness
- L1	9 tons	Ø 40 mm	40 mm

Pos.	Q'ty	Description	IHC Code no.
3	1	Connecting ring	86 10 24 02
5	1	Anvil.....	86 11 01 02
6	1	Pile guiding.....	86 10 24 01
<i>Connecting hammer to connecting ring</i>			
1	20	HV-ring	85 10 90 09
		id=Ø22	
2	20	Socket head screw	85 10 90 01
		M20x100 (12.9)	
<i>Connecting connecting ring to pile guiding</i>			
1	20	HV-ring	85 10 90 09
		id=Ø22	
2	20	Socket head screw	85 10 90 01
		M20x100 (12.9)	
4	1	O-ring	85 20 90 42
		780x5.33	

Remark

When pile driving in water or underwater an air hose connection is made on top of the connecting ring. A continuous flow of pressurized air prevents water entrapment into the sleeve.