




APPLICATION: Hydrohammer® S-200/280

Code no. 86.20.06.00

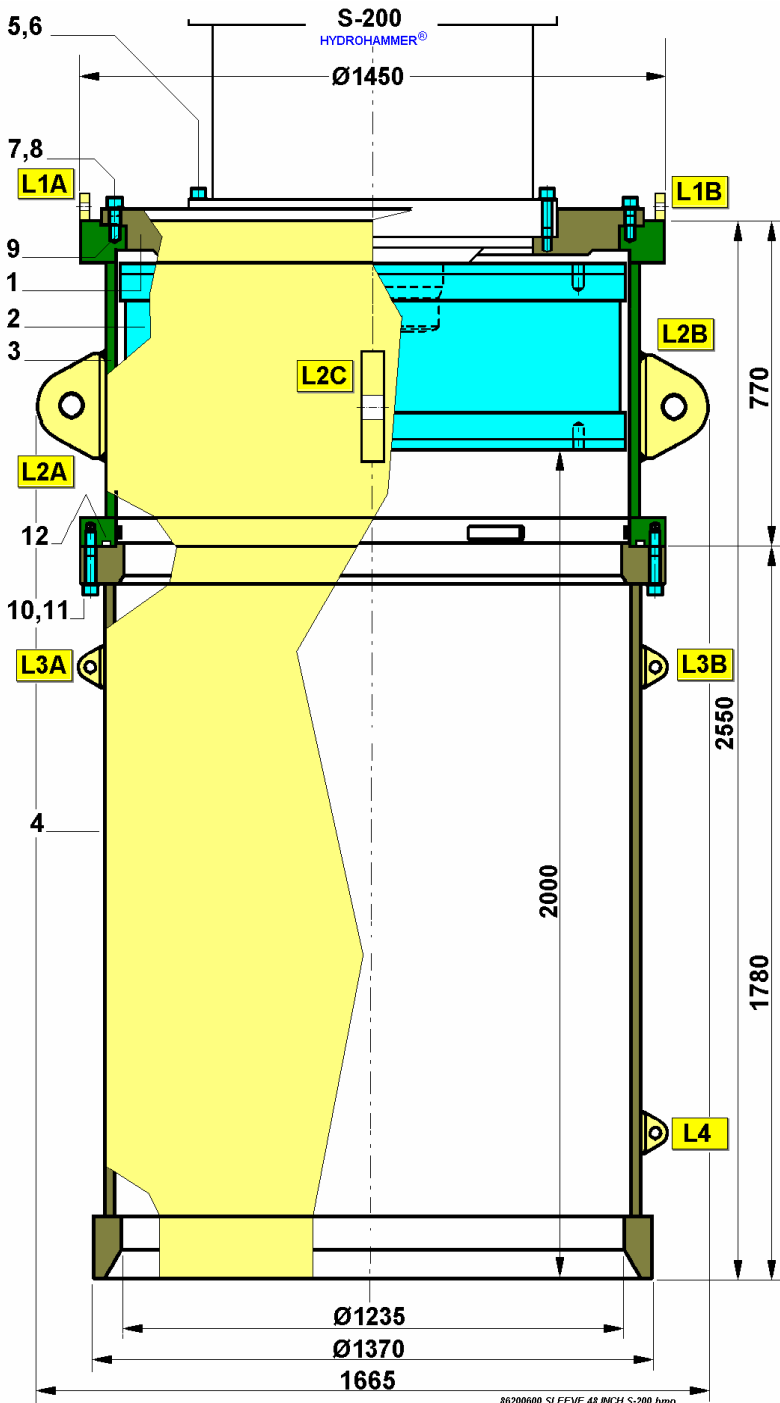

Weights

- Connection ring	545 kg
- Anvil housing	1040 kg
- Anvil	4200 kg
- Pile guiding	1835 kg
Total	7620 kg

Measures

Overall length	2550 mm
Overall width	1665 mm
Stick-up length	2000 mm

Lifting eyes	WLL	hole diameter	thick ness
- L1A/B	6.5 tons	Ø 27 mm	30 mm
- L2A/B/C	25 tons	Ø 54 mm	45 mm
- L3A/B	6.5 tons	Ø 27 mm	30 mm
- L4	6.5 tons	Ø 27 mm	30 mm

Pos.	Q'ty	Description	IHC Code no.
1	1	Connection ring	86 10 81 03
2	1	Anvil	86 16 62 02
2	1	Anvil housing	86 20 06 01
4	1	Pile guiding	86 20 06 06
<i>Connecting hammer to connection ring</i>			
5	40	HV-ring	85 10 90 10
		id=Ø26	
6	40	Socket head screw.....	85 20 90 01
		M24x130 (12.9)	
<i>Connecting connection ring to anvil housing</i>			
7	32	HV-ring	85 10 90 10
		id=Ø26	
8	32	Socket head screw.....	86 10 90 31
		M24x80 (12.9)	
9	1	O-ring	85 80 90 01
		1220x5.3	
<i>Connecting anvil housing to pile guiding</i>			
10	24	HV-ring	85 10 90 10
		id=Ø26	
11	24	Socket head screw.....	85 20 90 01
		M24x130 (12.9)	
12	1	O-ring	85 30 90 78
		1300x7 (L=4085)	

Raker piling: 1:4 MAX.